


MI-909R UHF Digital Stereo Bodypack Receiver

Features

- MI-909 wireless in-ear monitoring system is designed to replace conventional floor monitors. Its transmission is as reliable as an analog system, but its sound quality is far better thanks to the DSP (Digital Signal Processing) and digital diversity receiving technology, resulting in a superior S/N ratio and dynamic range, thus achieving natural sound reproduction and unprecedented performance.
- Features a user-friendly control system and long-distance transmission, it's ideal for large stage monitoring and simultaneous interpretation.
- A wideband digital encryption stereo receiver operating in the UHF band, featuring an unbreakable soft dual-antenna design and digital diversity receiving for reliable RF without signal drop-out. Selectable stereo, mono & mixed output modes and EQ settings can suit the users' preference, and a Ø 3.5 mm TRS jack provides left/right 120 mW @16 Ω output for earphones. Optional standard or professional Ø 3.5 mm TRS noise-isolating earphones are available.

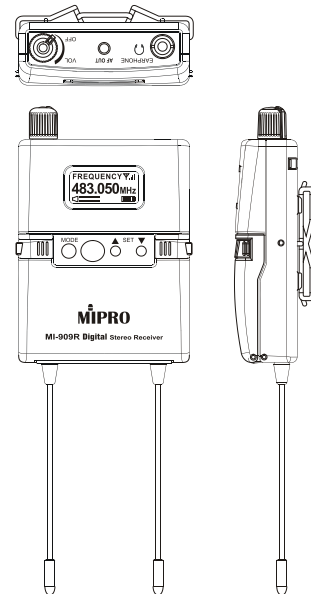

Specifications

Housing	Magnalium and glass-fiber reinforced plastic case
Display	Backlit LCD
Frequency Band	UHF 470 – 639 MHz, 705 – 960 MHz (country dependent)
Modulation Type	Digital modulation
Channel Setting	ACT™ sync
Receiving Mode	True diversity
Frequency Response	20 Hz – 15 kHz (stereo)
Stereo Separation	> 95 dB
S/N Ratio	95 dBA (stereo)
THD	< 0.1% @ 1 kHz
Sensitivity	10 μV input level, S/N > 90 dB
Earphone Jack	3.5 mm TRS
Battery	2 AA alkaline
Optional Accessories	E-8P or E-8S earphones
Dimensions	63 × 82 × 23 mm (W × H × D)
Weight	Approx. 95 g
Note	Refer to the actual product in the event of product description discrepancy



MIPRO Electronics Co., Ltd

Headquarters: 814 Beigang Road, Chiayi, 600079, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw

Specifications are subject to change without prior notice. MI023/01