



MM-590 Condenser / Dynamic Bifunctional Microphone

Features

- MM-590 is the first microphone that accepts both condenser and dynamic microphone capsule modules.
- A built-in AA battery can supply 48 V phantom power, which can be switched on or off.





MU-90
Frequency Response

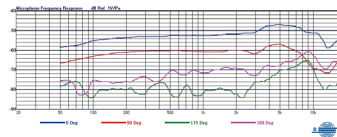

Maximum Distance: 50 cm
Test Instrument: Itek & Kwei 2012 & 9640

MU-59
Frequency Response

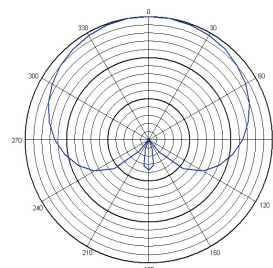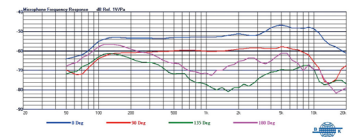

Maximum Distance: 50 cm
Test Instrument: Itek & Kwei 2012 & 9640

Specifications

Capsule Module	MU-90 / MU-59
Polar Pattern	Supercardioid
Type	Condenser / Dynamic
Sensitivity	-47 dBV / Pa
Housing	Sterling gray die-cast zinc alloy, with an output switch.
Frequency Response	50 Hz – 18 kHz
Output Impedance	Approx. 1.2 k Ω (MU-90) / Approx. 2.4 k Ω (MU-59)
Dimensions	51 × 200 mm (Ø × L)
Weight	Approx. 330 g (MU-90) / Approx. 360 g (MU-59)
Note	Refer to the actual product in the event of product description discrepancy.