


MM-206J Gooseneck Microphone

Features

- MM-2 Series gooseneck microphones can be bent at wide angles and are ideal for conference room and church applications.
- Multi-layered microphone grille effectively eliminates pop noise.
- 3 pin XLR plug, can connect directly to any mixer supplying phantom power.

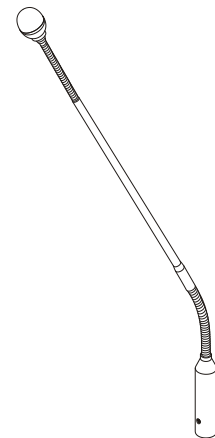

Specifications

Color	Black
Capsule	10 Ø mm unidirectional condenser microphone
Frequency Response	50 Hz – 18 kHz
Sensitivity	-46 ± 3 dBV / Pa (0 dB = 1 V / Pa)
Max. SPL	142 dB
Output Jack	3-Pin XLR male
Phantom Power	24 – 48 V
Length	585 mm
Weight	Approx. 180 g
Note	Refer to the actual product in the event of product discrepancy